
HTL 4017

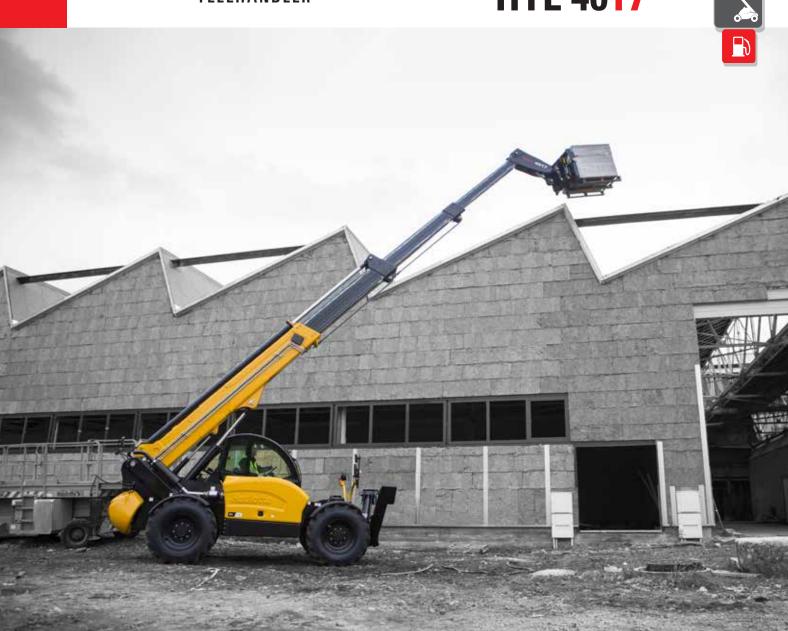

Performance and productivity

- > Best load capacities
- Rear axle lock and tilt corrector in standard
- Flow Sharing in standard enabling a simultaneous and proportional control of 4 movements

Powerful and robust

- High strength monoblock chassis
- > Rough terrain capacities
- Hydrostatic transmission and inching pedal

Comfort and ergonomy

- Driving position reducing fatigue at work
- LMI easy to read including automatic cut off dangerous movements
- > High safety cab
- Smart control 4 in 1 Joystick



Placing height: 16.7m



Maximum lift capacity: 4000 kg







Placing height: 16.7m Maximum lift capacity: 4000 kg

→ PERFORMANCES

Maximum lift capacity	4000 kg
Lift capacity to full height	2500 kg
Lift capacity at full reach	700 kg
Maximum fork height	16.7 m
Reach at maximum fork height	2.4 m
Maximum forward reach	12.85 m

→ DIMENSIONS

A Length	6.65 m
B Width	2.43 m
C Height	2.6 m
Wheelbase	2.89 m
■ Ground clearance	50 cm
F Track width	1.93 m
G Cab width	0.96 m
① Overall width - stabilizers down	3.34 m
Height to high boom pivot	1.75 m
Approach angle	29 °
■ Upper rotation of forks	18 °
Lower rotation of forks	104°
Turning radius (outside wheels)	4.5 m
Weight with forks	12000 kg
Tyres type	400/80-24

ENGINE

Engine model	PERKINS TIER III	KOHLER TIER IV	
Engine Capacity	4400 cm3	3400 cm3	
Engine power output	70kW @ 2300rpm	55.4kW @ 2200rpm	
Engine torque	392Nm @ 1400rpm	375Nm @ 1400rpm	
Transmission type	Hydro	Hydrostatic	
Fuel tank	130 l	130 l	
Engine oil	71	7	

STANDARD EQUIPMENT

- Backlighted e-tronic dashboard
- Hydrostatic transmission
- 4 wheel drive and steer
- Simultaneous and proportional controls for boom / telescopic arm / excavation and accessories movements
- Safety valves on hydraulic jacks
- Auxiliary hydraulic system
- Cut-off of dangerous movements when overloaded
- Tilt corrector: ±10°
- ROPS/FOPS cabin with heating and ventilation
- Hydraulic rear axle locking

OPTIONS AND ACCESSORIES

- Winches
- Jibs
- Forks
- Buckets
- Cold Weather Package
- Biodegradable oil
- Cold environment oil
- Hot environment oil
- Air conditioning
- Working lights
- Metal windscreen protector (FOPS)

