# SPEED LEVEL



- The original Speed Level sigma lift
- Climbs gradients of up to 50%
- Auto-levelling without the need for outriggers
- Suitable for most terrains
- Powerful 4x4 drive
- Ideal for rough terrain or work at height on sloped ground



# **SPEED LEVEL**

DIMENSIONS	SL26SL	SL30SL
Max. working height	10.0m	11.0m
Max. platform height (A)	8.0m	9.0m
Platform size (stowed)	1.72m x 3.66m	1.72m x 4.23m
Platform size (extended)	1.72m x 4.61m	n/a
Overall width (D)	2.13m	2.13m
Overall length (C)	3.79m	4.39m
Stowed height ( <b>B</b> )	2.6m	2.6m
Min. height (guardrails folded)	1.5m	1.5m
Chassis ground clearance	320mm	320mm
Axle ground clearance	200mm	200mm

#### PERFORMANCE

680kg	590kg	
8.0m	9.0m	
5.2km/h	5.2km/h	
0.8km/h	0.8km/h	
21/32 seconds	24/36 seconds	
50%	50%	
9°	9°	
13°	13º	
3.9m	3.9m	
26 x 12.00 - 12 NHS Supa Terra-Grip, poly filled		
Proportional joystick		
4 wheel drive with hydraulic motors and flow dividers		
	8.0m 5.2km/h 0.8km/h 21/32 seconds 50% 9° 13° 3.9m 26 x 12.00 Supa Terra-Gri Proportion: 4 wheel drive with	


# POWER


Power source	ce

WEIGHT		
Gross weight	3,085kg	3,400kg

Perkins diesel, water cooled engine

## LEVELLING CAPABILITIES

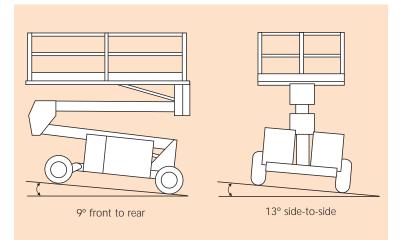



### STANDARD FEATURES

- Diesel power •
- Rated for up to 5 people plus tools •
- Descent alarm •
- Hour meter •
- Speed level automatic powered • platform levelling
- Oscillating front axle •
- Poly filled high grip tyres
- Dual multi-disc brakes •
- One-hand, proportional controls
- Power line to platform (no sockets)
- Fold-down guardrails
- CE approved

# **OPTIONS**

- Special paint colours •
- All motion alarm •
- Flashing amber beacon and horn •
- Diesel exhaust scrubber •
- Environmental green oil



e: sales@snorkellifts.com

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate Snorkel operators manual for detailed instructions on the proper use and maintenance.