


TB50

STRAIGHT TELESCOPING BOOM

POWER IN EXPERIENCE

- 40% less lifetime maintenance cost than leading competitors
- 40% better ROI than leading competitors
- Excellent serviceability

Snorkel

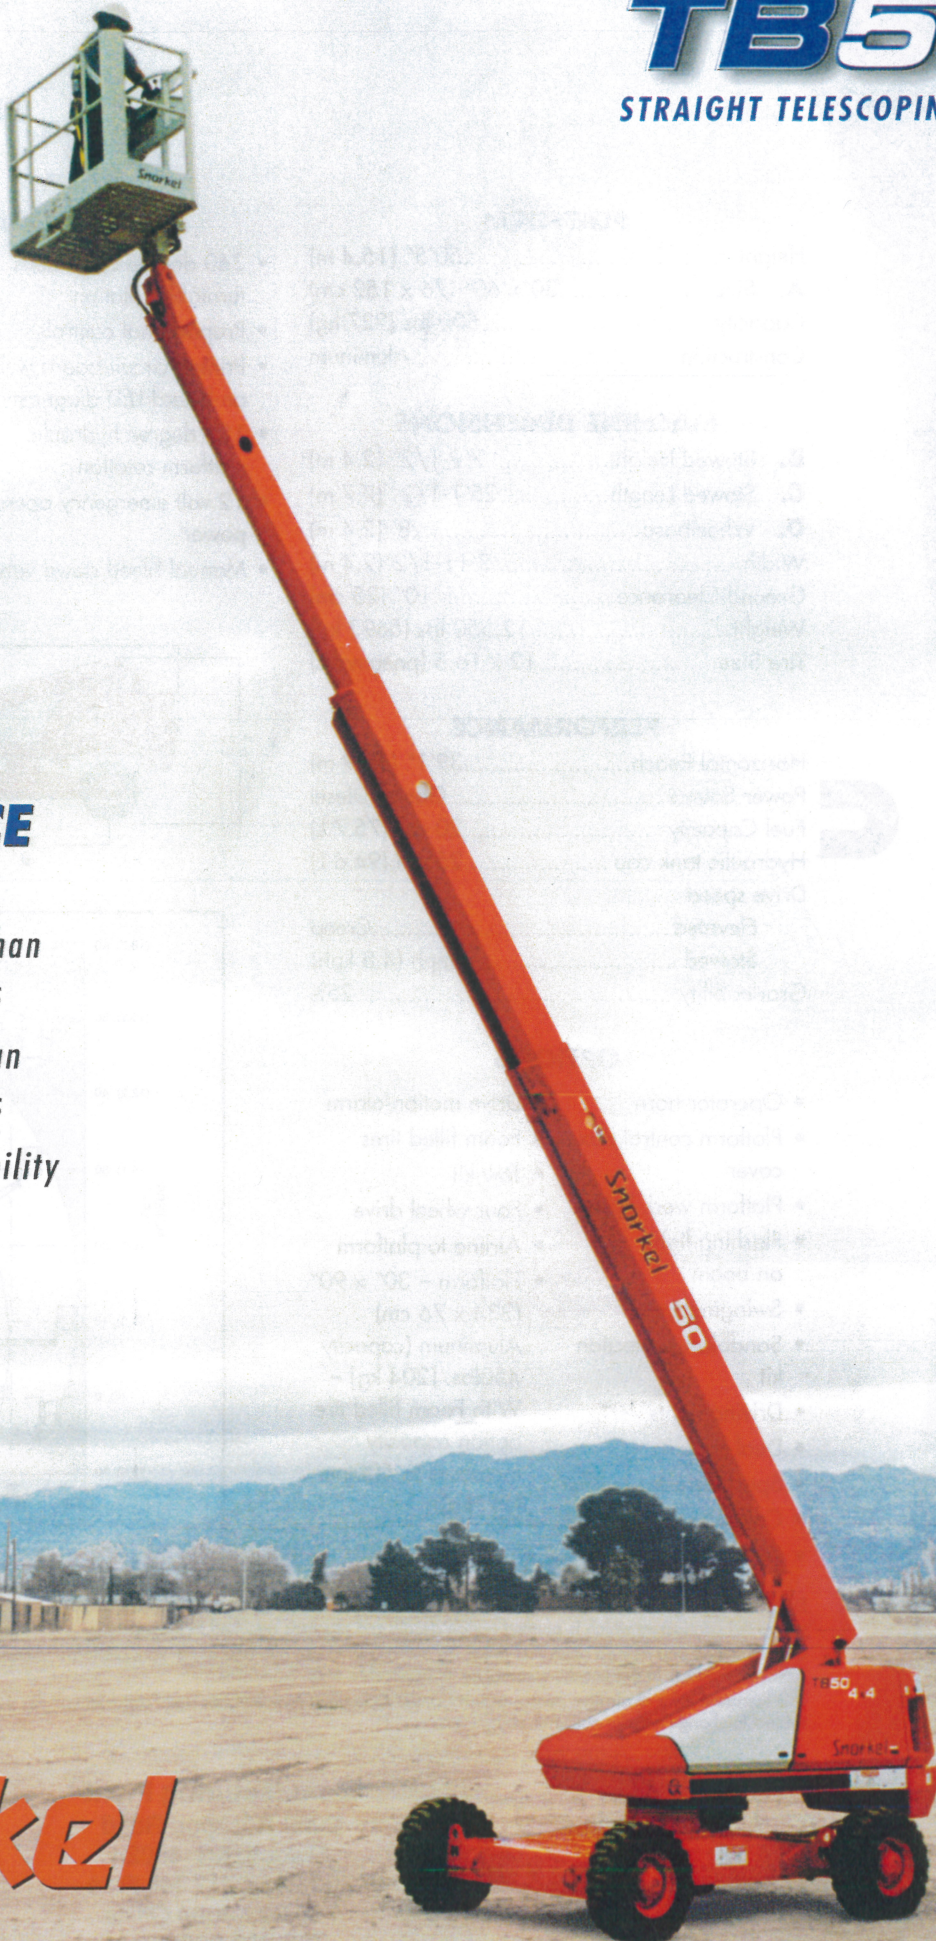

TB50

STRAIGHT TELESCOPING BOOM

PLATFORM

Height50'5" (15.4 m)
A. Size30" x 60" (76 x 152 cm)
 Capacity500 lbs (227 kg)
 ConstructionAluminum

MACHINE DIMENSIONS

B. Stowed Height.....7'9-1/2" (2.4 m)
C. Stowed Length.....25'1-1/2" (7.7 m)
D. Wheelbase.....8' (2.4 m)
 Width7'11-1/2" (2.4 m)
 Ground Clearance10" (25 cm)
 Weight.....12,550 lbs (5693 kg)
 Tire Size.....12 x 16.5 (pneumatic)

PERFORMANCE



Cummins Horizontal Reach.....39'1" (11.9 m)
 Power SourceGas or Diesel
 Fuel Capacity20 gal (75.7 L)
 Hydraulic tank cap25 gal (94.6 L)
 Drive speed
 ElevatedCreep
 Stowed3 mph (4.8 kph)
 Gradeability25%

OPTIONS

- Operator horn
- Platform control box cover
- Platform work lights
- Flashing light on boom
- Swinging gate
- Sandblast protection kit
- Driving lights
- Dual Fuel
- Spark arrestor muffler
- Cold weather start kit
- AC Generator
- Drive motion alarm
- Foam filled tires
- Tow kit
- Four wheel drive
- Airline to platform
- Platform - 30" x 90" (234 x 76 cm) Aluminum (capacity 450lbs. [204 kg] - With Foam filled tire option capacity increases to 500lbs. [227kg]).

STANDARD FEATURES

- 360 degree continuous turntable rotation
- Proportional controls
- Printed circuit board with on-board LED diagnostics
- 180 degree hydraulic platform rotation
- 12 volt emergency operated power
- Manual bleed down valve
- Engine anti-restart
- Oil level/temp gauges
- Driveable at full height
- Tilt alarm
- 125 volt GFCI AC outlet
- Aluminum upper booms
- Hour meter
- High engine temp/low oil pressure shut down
- Lifting lugs

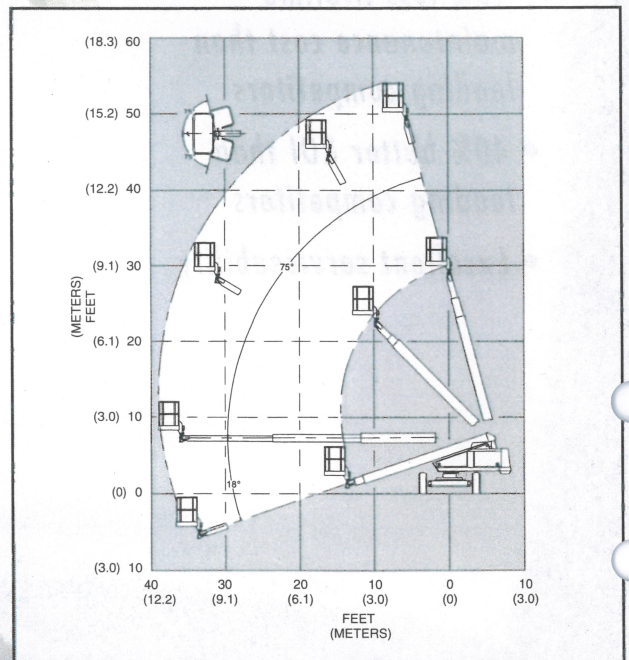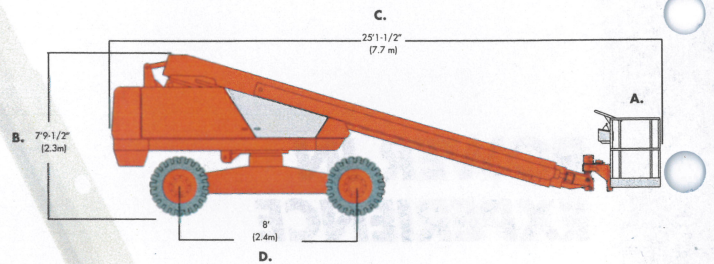

DANGER: Models described in this brochure are NON-INSULATED and do not provide electrocution protection from contact with or close proximity to energized conductors which is pointed out on decals and placards attached to the machine.

Only qualified and trained operators are to be authorized to use and operate a work platform. Aerial work platforms must be elevated only on firm, level surface. Products in this brochure comply with applicable ANSI Standards.

This literature is for illustrative purposes only. Consult Operating Maintenance and Parts Manuals for proper procedures. Specifications may vary and are subject to change without notice or obligation.

Snorkel

An ISO 9001 Registered Company
 Printed in U.S.A. TB50 10-02

Manufacturing Plant
 2009 Roseport Road
 Elwood, KS 66024
 800-255-0317 Toll Free
 785-989-3000 Office
 785-989-3070 Fax

Australia
 26 Redfern Road
 Wetheril Park NSW
 2164 Australia
 (02) 9725 4000 tel
 (02) 9609 3057 fax